



*LaBounty*

**MOBILE**

**SHEARS**

INDUSTRY PIONEER,  
LEADER IN PERFORMANCE


# MOBILE SHEARS

## THE PRODUCT THAT SET THE BAR

We know it's what's on the ground at the end of the day that counts. That's why LaBounty shears have long been designed and built to maximize performance, longevity and significantly reduce downtime.

LaBounty shears have proven themselves in scrap metal processing, bridge deconstruction, and industrial demolition for decades.

## FEATURES & BENEFITS

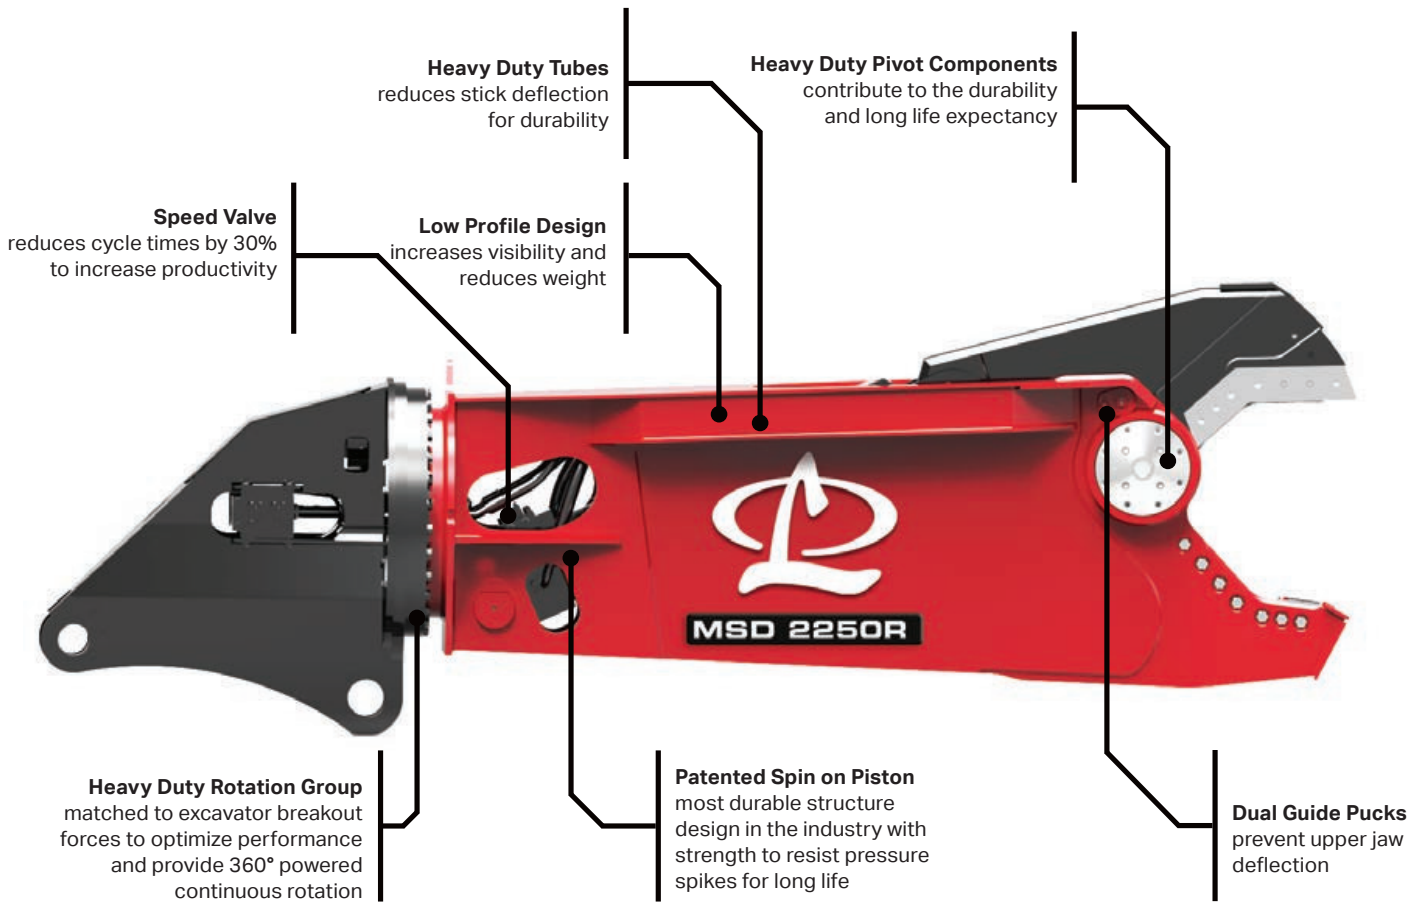

## EXCLUSIVE PATENTED FEATURES



**Patented, Reversible**  
Saber Tip for less maintenance, more uptime, lower operating cost



**Patented Wraparound Blades**  
for less wear of parent material to reduce welding and maintenance

# MSD, BLS, MWS SERIES SPECIAL APPLICATIONS



## COMPACT BUT FEROCIOUS - MSD 7R

Specifically designed for mini excavators and skid steer loaders. This shear is excellent for applications where using larger equipment is not possible or practical such as interior demolition work or use in small ferrous and non-ferrous scrap yards.



MSD 7R

## MID SIZED AND VERSATILE - MSD 800 & 800R

The MSD 800R Mobile Shear is for use in scrap processing applications as well as for interior demolition. The MSD 800R helps complete LaBounty's full span of the MSD line for a powerful dedicated shear compatible with mini excavators and backhoes.



MSD 800R

## MINIMAL INVESTMENT-MAXIMUM CUTTING - BLS SERIES

BLS Bucket Linkage Shears are designed for cutting light to medium sized material such as structural steel, pipe, rebar, tires and concrete. Ideal applications for BLS Shears include light scrap processing and demolition clean up.



BLS 2000

## SMOOTH CUTTING ACTION - MWS SERIES

MWS Mobile Wood Shears are ideal for applications involving downsizing of wood materials including tree stumps, logs, railroad ties, wood demolition debris and other oversized wood products. MWS Shears excel in wood waste recycling and land clearing operations, removing dirt and rocks, resulting in less tub grinder maintenance and a cleaner by-product.



MWS 80



# MSD, BLS, MWS SERIES SPECIFICATIONS



## MSD SERIES - SHEARS

Model	Weight*		Jaw Opening		Jaw Depth		Reach**		Min Excavator Weight - 2 <sup>nd</sup> Member***		Min Excavator Weight - 3 <sup>rd</sup> Member***	
	lbs	kg	in	mm	in	mm	ft	m	lbs	m Tons	lbs	m Tons
MSD 7R	1,200	500	11	280	10	250	6.0	1.8	7,000	3	15,000	7
MSD 800	2,250	1,000	15	380	17	430	5.7	1.7	15,000	7	22,000	10
MSD 800R	2,750	1,200	15	380	17	430	7.2	2.2	20,000	9	26,000	12
MSD 1000	4,200	1,900	19	480	20	510	6.0	1.8	20,000	9	35,000	16
MSD 1000R	4,400	2,000	19	480	20	510	8.5	2.6	22,000	10	40,000	18
MSD 1500	6,600	3,000	22	560	25	640	6.8	2.1	26,000	12	55,000	25
MSD 1500R	7,000	3,200	22	560	25	640	10.0	3.1	40,000	18	66,000	30
MSD 2000	8,450	3,800	28	710	30	760	8.0	2.4	42,000	19	70,000	32
MSD 2000R	10,200	4,600	28	710	30	760	12.0	3.7	48,000	22	88,000	40
MSD 2250	10,500	4,800	30	760	30	760	8.0	2.4	44,000	20	88,000	40
MSD 2250R	12,500	5,700	30	760	30	760	11.8	3.6	53,000	24	99,000	45
MSD 2500	11,800	5,400	32	810	34	860	8.8	2.7	51,000	23	88,000	40
MSD 2500R	14,600	6,600	32	810	34	860	13.3	4.1	66,000	30	110,000	50
MSD 3000	13,300	6,000	35	890	38	970	10.0	3.1	66,000	30	143,000	65
MSD 3000R	17,000	7,700	35	890	38	970	14.5	4.4	88,000	40	154,000	70
MSD 4000	16,800	7,600	40	1,020	44	1,120	12.0	3.7	77,000	35	143,000	65
MSD 4000R	19,000	8,600	40	1,020	44	1,120	15.0	4.6	99,000	45	165,000	75
MSD 4500	17,900	8,100	38	970	43	1,090	11.2	3.4	88,000	40	165,000	75
MSD 4500R	21,000	9,500	38	970	43	1,090	16.0	4.9	110,000	50	187,000	85
MSD 7500	25,500	11,600	43	1,090	45	1,140	12.0	3.7	132,000	60	CONSULT FACTORY	
MSD 7500R	30,000	13,600	43	1,090	45	1,140	17.5	5.3	165,000	75	CONSULT FACTORY	
MSD 9500	37,500	17,000	48	1,220	52	1,320	15.5	4.7	176,000	80	CONSULT FACTORY	
MSD 9500R	45,600	20,700	48	1,220	52	1,320	22.0	6.7	264,000	120	CONSULT FACTORY	

\*Weight includes standard excavator mounting bracket. Attachment weight may vary depending on mounting configuration as well as options.

\*\* Reach is measured from the attachment mounting pivot (boom or stick) forward to the end of the jaw.

\*\*\* Excavator weight range should be used as a guide only, all mounting configurations must be preapproved by LaBounty.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

## BLS SERIES - BUCKET LINKAGE SHEARS

Model	Weight		Jaw Opening*		Jaw Depth		Min Excavator Weight - 3 <sup>rd</sup> Member	
	lbs	kg	in	mm	in	mm	lbs	m Tons
BLS 2000	2,900	1,300	20	510	20	510	44,000	20
BLS 3000	4,800	2,200	22	560	23	580	66,000	30

## MWS SERIES - MOBILE WOOD SHEARS

Model	Weight		Jaw Opening*		Jaw Depth		Min Excavator Weight - 3 <sup>rd</sup> Member	
	lbs	kg	in	mm	in	mm	lbs	m Tons
MWS 40	3,000	1,400	40	1,020	29	740	44,000	20
MWS 80	5,100	2,300	60	1,520	41	1,040	66,000	30

\* Jaw openings vary based on excavator specific geometry.

LaBounty reserves the right to improve, update, or change the product specifications, appearance, or functional attributes without notice.

